

POLYMER TECHNOLOGY

Third Edition

by

D. C. Miles,

**F.I.M.
(Consultant)**

and

J. H. Briston,

B.Sc., C. Chem., F.R.S.C., F.I.M., F. Inst. Pkg.

©1996

Chemical Publishing Co., Inc.

ISBN: 0-8206-0344-9

Printed in the United States of America

CONTENTS

Preface

PART I GENERAL

1. Introduction	1
2. Raw Materials	35

PART II MATERIALS

Section A Thermosets

3. Phenoplasts	52
4. Aminoplasts	73
5. Polyesters	89
6. Epoxy Resins	121
7. Silicones	146
8. Polyurethanes	168

Section B Thermoplastics

9. Polyolefins	193
10. Vinyls	238
11. Polystyrene and Copolymers	273
12. Polyamides	305
13. Acrylic Polymers	330
14. Fluorocarbon Polymers	345
15. Thermoplastic Polyesters	359
16. High-Performance Thermoplastics	370
17. Heat-Resistant Thermoplastics	389

Section C Natural Polymers and Derivatives

18. Polymers of Natural Origin	404
19. Derivatives of Natural Polymers	411

Section D Rubberlike Polymers

20. Natural and Modified Rubbers	436
21. Synthetic Rubbers	451

Section E Inorganic Polymers

22. Inorganic and Semiorganic Polymers	477
--	-----

Section F Compounding Ingredients

23. Plasticizers, Stabilizers, and Related Additives	486
24. Fillers, Colorants, and Special Additives	502

PART III PROCESSES

Section A Thermosetting

25. Compression and Transfer Molding	520
--	-----

Section B Thermoplastics

26. Extrusion	533
27. Injection Molding and Blow Molding	557
28. Thermoforming	585
29. Powder Coating	603
30. Miscellaneous Processing Techniques	626

PART IV TESTING

31. Physical and Chemical Testing of Plastics	666
---	-----

Index	698
-----------------	-----

PREFACE TO THE THIRD EDITION

Once again the many advances in polymers and their associated processes have rendered necessary a new edition of this book.

The Material chapters have been updated to include linear low density polyethylene (LLDPE), pearlescent polypropylene, amorphous nylon (Sclar PA), poly (ethylene terephthalate) (PET), ethylene/vinyl alcohol copolymers (EVOH), poly (etherimide) (Ultem), and poly (etheretherketone) (PEEK).

The chapters on Processing have also been updated to take account of developments in powder coating, coextrusion, injection and blow molding, solid phase pressure forming, and thermoforming (including blister and skin packaging). New additions include sections on stretch blow molding, multi-layer (coextrusion) bottle blowing, and the decoration of plastics.

The chapter on Testing has been expanded to include water vapor and gas transmission, while the section on optical tests has been enlarged.

As in previous editions, the applicational aspects have also been updated so that the book will continue to serve the needs of the users of polymers, as well as those of chemists, engineers and technicians in the industry.

PREFACE TO THE SECOND EDITION

Since the first edition of this book there has been a tremendous growth in both polymers and processes.

The framework of the original book seemed to meet with the general approval so this has been retained but a great deal of new materials has been added in order to keep it up-to-date. As well as two new complete chapters on Heat Resistant Thermoplastics and Powder Coating there have been substantial additions to most of the other chapters. Chapter 16, for example, contains information on a number of new materials and has been retitled High Performance Thermoplastics.

Additional materials covered include polyimides, aromatic polyamides, polysulfone, poly (methyl pentene), parylene, polyphenylene oxide and many others. New processes include the molding of structural foams, coextrusion, powder coating, solid phase forming, form/fill/seal bottle blowing, and film fibers.

As in the first edition a great deal of emphasis has been placed on the applications of materials and processes so that the book will continue to be of interest and help to users of plastics and rubbers as well as to chemists, engineers and technicians in the industry.

PREFACE

The past few years have seen the development of many new polymeric materials, some of them, such as polypropylene and polyisoprene rubber, being the results of completely new polymerization techniques. There have also been corresponding advances in processing techniques. Some of these developments have been the subject of separate textbooks or monographs, while at the other end of the scale there are multi-volume works with each chapter written by specialists.

It seemed to us, however, that there was still room for a book which would cover the most important of these developments in a single volume and incorporate them into the general framework of plastics technology. Originally we were guided to some extent by the syllabus for the plastics technology papers of the Graduateship Examination of the Plastics Institute, since it appeared that there were no single texts available to students. The framework suggested by this approach, namely, Materials, Processes and Testing, remains but with additional material and a slight change of emphasis. These changes should still enable the book to act as a basis for students intending to sit for the Plastics Institute and City and Guilds Examinations as well as the Polymer Technology route to Licenciateship of the Royal Institute of Chemistry.

We have, for instance, included some material on natural, synthetic and modified rubbers following the decision to form a Joint Examining Board for the Plastics Institute and the Institute of the Rubber Industry, at the same time altering the title of the book to *Polymer Technology* from *Plastics Technology*. We also decided to place more emphasis on the applications of plastics, linking these with the properties of the various materials and the conversion processes available. There is an increasing number of people, in a wide variety of industries, who find that they need to know something about the uses of polymers, their advantages and their limitations. Not all of these people have a technical background and we have tried to keep their needs in mind, as well as those of chemists, engineers and technicians.

Finally, for any reader who finds that he needs to know more on any particular topic in this book, we have included suggestions for further reading at the end of each chapter. While these do not include every book written on polymers, they form a fair cross section and can themselves act as stepping stones to more advanced tomes, if desired.

D. C. MILES

J. H. BRISTON

ACKNOWLEDGMENTS

We gladly make acknowledgment here to all those companies and institutions who made available to us items such as technical information on their products, photographs and sketches:


Bakelite Ltd.; Baker Perkins Granbull Ltd.; Bayer Farbenfabriken A.G.; B.I.P. Chemicals Ltd.; B.I.P. Tools Ltd.; David Bridge & Co. Ltd.; Brit. Celanese Ltd.; Brit. Cellophane Ltd.; T.H. & J. Daniels Ltd.; The Distillers Co. Ltd.; Farrel-Birmingham Co. Inc.; Fibreglass Ltd.; Fothergill & Harvey Ltd.; Hercules Powder Co.; *Plastics*; *Plastics International*; Projectile & Engineering Co. Ltd.; Scott Bader and Co. Ltd.; Shaw, Francis and Co. Ltd.; Turner Brothers Asbestos Co. Ltd.

PART I GENERAL

1.

INTRODUCTION

A polymer may most easily be defined as a material which is composed of comparatively simple recurring units. Well-known examples which occur in nature are the polysaccharides such as starch and cellulose, which are made up of very large numbers of glucose units. Another well-known polymer is natural rubber (polyisoprene); its repeating unit is shown below.



Many other polymers occur in nature but few of them concern us here. As is pointed out in the Preface, our intention in this book is to deal with the technology of certain polymeric materials known as plastics, but for the sake of completeness the subject of rubbers needs to be touched upon.

For a definition of plastics we cannot do better than repeat that given in the British Standards Institute publication, *Glossary of Terms used in the Plastics Industry* (B.S. 1755: 1951) which says, 'Plastics—A wide group of solid composite materials which are largely organic, usually based on synthetic resins or upon modified polymers of natural origin and possessing appreciable mechanical strength. At a suitable stage in their manufacture most plastics can be cast, molded or polymerized directly to shape. Some plastics are rubber-like while some chemically modified forms of rubber are considered to be plastics.'

Rubber is a little harder to define but the following, based on performance characteristics at room temperature, is adequate: 'A rubber is a ma-

terial capable of being stretched to at least double its original length and then returning, rapidly and forcibly, to substantially its original length. An additional requirement is that it shall be capable of being easily formed in its raw state but after vulcanization it shall be able to retain a given size and form.' The theory and practice of vulcanization are discussed in a later chapter dealing with rubbers but it may be briefly noted here that the effect of vulcanization on a rubber is to reduce its plasticity while effectively maintaining its elasticity. Surface tackiness is decreased, while the strength is increased. In many cases it is possible to produce hard materials, as instanced by the material known as 'ebonite.' The first half of the definition above would include many plastics which are, however, excluded because they cannot be vulcanized.

Plastics themselves can be divided into two main subgroups, namely, thermoplastics and thermosets (or thermo-hardening) materials. Thermoplastics are materials which have the property of softening repeatedly on the application of heat and of hardening again when cooled, while thermosets soften once and then harden irreversibly on the application of sufficient heat (usually referred to as 'curing'). When a thermosetting resin is 'cured' it is insoluble in solvents.


From the definition of rubbers given above, it can be seen that these form an intermediate class of material somewhere between the thermoplastics and the thermosets. Thus, they are thermoplastic during forming operations but are 'cured' or vulcanized after forming to an intermediate elastic or rubbery state and, in some instances, the 'cure' may be prolonged to produce a material closely resembling a thermoset.

The difference in the formation of thermoplastics and thermosetting materials can be explained by reference to the Theory of Functionality, which was first produced by R. H. Kienle. This theory may best be explained using a diagrammatic approach, as follows:

Let the monomer unit be represented as a circle, \bigcirc , and each functional group (or reactive center) within the monomer be represented by a dash, —.


A monofunctional moner (f) = 1 would thus be represented as $\bigcirc—$.

Since reaction can take place only between reactive groups or centers the only type of compound which can be formed is of the type shown here, $\bigcirc—\bigcirc$. An example of this type of reaction would be that between a monohydric alcohol with a monocarboxylic acid to give an ester, e.g.,




Let us now consider a monomer with functionality (f) = 2. Reaction


can then continue to give long-chain molecules, in the manner pictured below.




An example of this type of reaction is the formation of a linear polyester from a dihydric alcohol and a dibasic acid, e.g.,

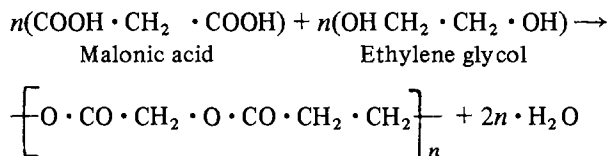

It should be noted, in passing, that a reactive double bond possesses a functionality of 2 since it can open in such a way that it will connect up with two other groups.




The asterisk denotes that the attached bond can react with other reactive groups which may be present. For a treatment of the kinetics governing such reactions one must refer to textbooks on physical chemistry but it should be emphasized that the reaction is not a straight build-up of one chain only. Very many chains are in the process of formation at any instant and each chain competes for monomer with all other chains. Chain formation ceases when the supply of monomer is exhausted or when reaction occurs with a monofunctional molecule, such as a catalyst residue, solvent molecule or an impurity. Monofunctional compounds are also added deliberately to control the chain length (and hence the molecular weight) of the polymer.



We have said that only molecules of a functionality of 2 or higher can react to form a polymer but while this is true, it does not necessarily mean

that di-functional molecules will always polymerize. Sometimes a functional group is shielded by other groups, and in some cases the formation of a ring compound is favored, either by the geometry and nature of the reacting molecules or by the reaction conditions. If a six-membered ring can be formed, for instance, by intraesterification, then polymerization will rarely occur. Reaction in dilute solution also favors ring formation since the reactant molecules are separated from each other by the solvent molecules, and the chance that the ends of the same molecule will come together is greater than that of their meeting, and reacting, with different molecules. The reaction of methylene diamine and malonic acid, for example, leads to the formation of a six-membered ring as shown below.

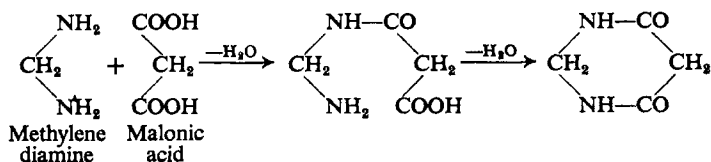


Once the molecule with reactive ends is formed, ring formation is an easy subsequent step. Six-membered rings are the ones most easily obtained because such rings are formed with the least distortion of the bonds connecting the individual atoms. Closer study of these and similar factors governing the formation of polymers is more properly the province of the physical chemist: some excellent texts are available and are given in the reading list at the end of this chapter.

The linear polymers formed by the reaction of difunctional molecules are members of the subgroup of plastics which we have already defined as thermoplastics. The long-chain molecules are held together by relatively weak intermolecular (or Van der Waal) forces, and energy, in the form of heat, will cause the molecules to move relative to each other and the material will then flow. Differences in the softening point of different plastics are due to the relative strength of their intermolecular forces. Polar molecules, such as those of nylon, have greater attraction for each other than nonpolar ones such as polyethylene, and the softening point of the former is, therefore, greater than that of the latter. As is usual in the polymer field this is not the whole story and we find that the softening point


of polystyrene is lower than that of polyethylene in spite of the fact that polystyrene, too, is a polar molecule. This is because there are bulky groups attached to the polystyrene molecule, which prevent a close approach of the polymer chains with a consequent lessening of the attractive forces between them. Less energy (i.e. heat) is necessary, therefore, to cause relative movement or slipping of the chains.

We may now take a brief look at the consequences of including a material with a functionality of 3 among our reactants. Using the pictorial representation referred to previously we see that it is possible to build up a complete network. The diagram shown below is, of course, a two-dimensional representation of what is, in reality, a three-dimensional network.

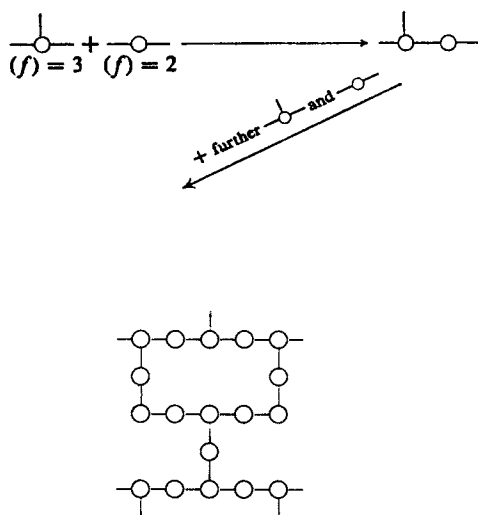

An example of the type of reaction shown above, where the reactants have functionalities of 3 and 2, is given by the formation of phenol-formaldehyde resins.

The three-dimensional type of polymer typified by phenol-formaldehyde exhibits the type of behavior described earlier as thermosetting, the fully cured compound being unable to flow under the action of heat. Each carbon atom in the network is bound by primary valence bonds to

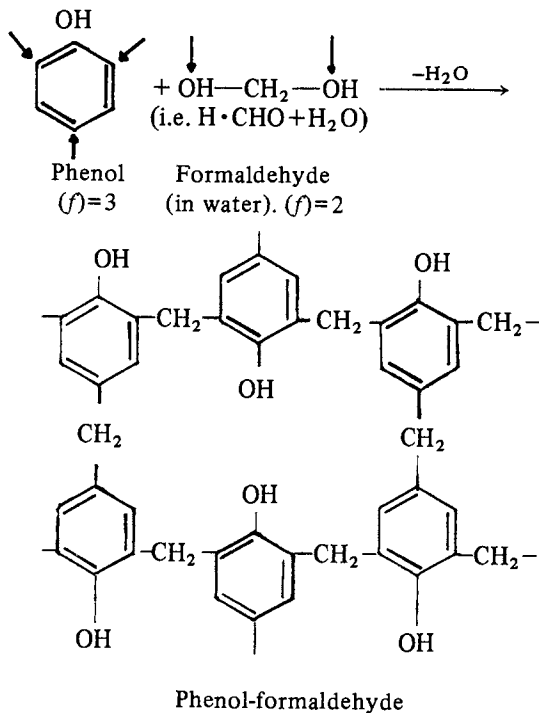


other carbon atoms so that relative movement is almost impossible. In addition, such a structure prevents penetration by solvent molecules and subsequent dispersion so that although solvents may sometimes cause swelling of thermosets they cannot produce a solution.

Intermediate stages are possible in the above and similar reactions, and advantage is taken of this fact in the fabrication of articles from the raw materials. If we consider Stage 1 to be the existence of the starting materials in their monomeric form, and Stage 3 the completely cured compound, then we can visualize a Stage 2 when the full network has not yet been built up and some flow is still possible under the influence of heat. The resin manufacturer stops the reaction at Stage 2 and sells the product in the form of pellets or as a powder. The molder takes this intermediate product and forms it into the required shape, using heat and pressure. The

conditions used to promote the flow in the mold are also sufficient to cause the completion of the fully linked network so that the shape, once formed, is permanent.


During the discussion on the case of the reaction between two difunctional materials it was mentioned that polymerization would not always take place because a functional group might be inoperational due to the shielding by other groups. The same arguments apply to reaction between di- and tri-functional groups, an excellent example being the reaction between glycerin and phthalic acid. Glycerin is a tri-functional compound, as can be seen from its formula, namely,



the functional groups being arrowed.

However, the central OH group is, to some extent, shielded by the other two, and temperatures of between 250 and 270°C are necessary to cause reaction of all three OH groups. At lower temperatures (200–240°C) a linear product is obtained, as one would expect from two difunctional compounds.


In passing we may mention compounds having a functionality of 4. A common class of tetrafunctional compound is that of the dienes (compounds having 2 double bonds). The normal reaction of compounds where the 2 double bonds are separated by one single bond (normally referred to as conjugated dienes) is as a difunctional compound but leaving a residual double bond in the molecule.

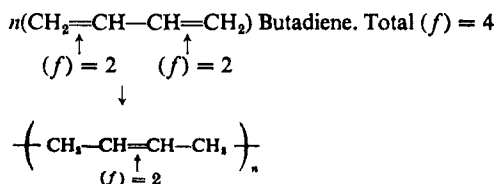

The residual functionality of 2 can be utilized to combine with material such as sulfur to produce three dimensional networks.

Addition Polymerization

In addition polymerization, the resultant polymer is obtained by the combination of a number of simple basic substances (monomers) without loss. Addition polymers are usually thermoplastics. The monomers contain a double bond and, with the exception of fluorinated compounds, always contain the methylene group, CH_2 . In other words, the basic monomer in addition polymerization is of the general formula $\text{CH}_2 = \text{C} \cdot \text{R}_1\text{R}_2$ except, as already stated, in the case of $\text{CF}_2 = \text{CF}_2$ and $\text{CF}_2 = \text{C} \cdot \text{ClF}$. The explanation appears to lie in the relative sizes of the atoms, that of fluorine being the smallest in size, next to hydrogen, which will combine with carbon. Probably the best known example of addition polymerization is that of ethylene to give polyethylene.



There are four basic methods of carrying out addition polymerization and these have certain advantages and disadvantages which are characteristic of the method, irrespective of the monomer being polymerized. In order to facilitate reference to these methods, when considering the formation of the various addition polymers in greater detail later in the book, a brief description and evaluation of each method is given in this chapter.

(a) *Bulk Polymerization.* This is the simplest of the four processes since pure monomer only is used, except for the addition of a catalyst when necessary. The mixture is usually stirred in a large reaction vessel, with or without the addition of heat. The chief advantage of this method is obviously the purity of the final product with the concomitant advantages of excellent color and clarity in transparent polymers such as polystyrene. Bulk polymerization may also be considered to be economically attractive, since the raw material costs consist only of the monomer, but the difficulties of manufacture may sometimes balance this. These manufacturing difficulties arise from the fact that addition polymerization reactions are usually exothermic in nature and with large quantities of undiluted reactants there is, thus, an acute problem of heat dispersal. In addition, as the reaction proceeds, there is an increase in viscosity, and stirring becomes first difficult and eventually impossible, if the reaction is allowed to go to completion.

(b) *Solution Polymerization.* The monomer and catalyst are dissolved in an inert solvent the resultant solution being heated and stirred. In gen-

eral, both heating and stirring problems are eased in solution polymerization, which is also more suitable for continuous processing than is bulk polymerization. There are, however, serious economic problems due to the use of large quantities of expensive solvents which have, therefore, to be recovered and separated. The purity of the resultant polymer is lower than with bulk polymerization because, even with nominally inert solvents, there is frequently some reaction with the active centers of the growing polymer chain, which leads to the existence of solvent fragments in the finished molecule. The polymer is also soluble in the solvent and the removal of the last traces of solvent is rather difficult and expensive. For this reason the solution process is often resorted to for those applications in which the polymer is required in solution form. Surface coatings and impregnating compositions are among the commonest examples where the polymer is applied as a solution, thus rendering evaporation of the original solvent unnecessary.

(c) *Emulsion Polymerization.* In this process the continuous medium is usually water, and the monomer is dispersed instead of dissolved as in the previous process. The resultant polymer is also insoluble in the medium and is thus precipitated as it is formed. The catalysts used are those which are soluble in the dispersing medium, and emulsifying agents such as sodium or potassium salts of fatty acids are added to stabilize the emulsion. After the reaction is completed, the precipitated product is washed in order to remove emulsifying agents, but these are difficult to remove completely and some contamination always remains. There are, of course, few heat transfer problems in such processes because the heat is mainly carried away by the water. One other factor of interest in this process is that it produces the highest molecular weight product.

(d) *Suspension Polymerization.* The monomer in this process is suspended in the carrier medium (usually water) together with a monomer-soluble catalyst. When the mixture is stirred, the monomer is broken into small droplets, each of which will contain a little of the catalyst. A stabilizer, such as methyl cellulose, or starch, is also included in the mixture in order to keep the particles separate from each other during the reaction. These stabilizers are easily removed after the reaction by washing or flotation, leaving the polymer in the form of small beads or 'pearls.' This process can be looked upon as a large number of tiny 'bulk' polymerizations without the disadvantage of heat removal problems. The molecular weight of suspension process polymers is also fairly high.

INDEX

A

- accelerators for rubbers, 441, 442
- acetal resins, 370-376
 - applications, 376
 - processing, 375
 - properties, 373-375
- acetic acid, 421
- acetic anhydride, 421
- acetylene, 43, 239, 240, 297, 298, 332, 350
- acid value, 100
- acrylic acid, 331
- acrylic fibers, 341, 342
 - applications, 339, 340
 - history, 330
 - polymerization, 334-336
 - preparation of monomers, 330-333
 - processing techniques, 338, 339
 - properties, 336-338
- acrylic rubbers, 341
- acrylonitrile, 44, 296, 297
- acrylonitrile/butadiene/styrene copolymers, 299-303
- activators, 441, 442
- addition polymerization, 9-11
- additives for films, 517, 518
- adipic acid, 95, 174, 306
- alkyds, 89, 90, 109, 116
- alloprene, 449
- allyl alcohol, 94
- allyl chloride, 122
- aluminum polymers, 479
- ω -amino acids, 305
- ω -amino caproic acid, 305, 307
- aminoplasts, 73-88
 - applications, 85-88
 - manufacture, 77-81
 - processing techniques, 83, 84
 - properties, 84, 85
 - raw materials, 74, 75
 - resinification, 76, 77
- ω -amino undecanoic acid, 305, 307, 308
- antimony oxide, 513
- antioxidants, 442, 500, 501
- apparent powder density, 669
- arc resistance, 678
- arcton, 346
- arsenic polymers, 484
- asbestos, 504
 - in bituminous molding compounds, 406
- asphalt, 405, 406
- A.S.T.M., 452, 666
- atactic polypropylene, 225, 226
- autocatalysis, 501
- autoclave batch preexpander, 281, 282

autoclave molding, 282
AZDN, 515
azelaic acid, 95

B

back pressure in extruders, 534, 535
Baekland, 28, 52
Baer, 465
bag molding, 114
Banbury, 161
Barex, 343, 344
Baumann, 238
Bayer, 29, 168
beading, 548
Beadle, 28, 428
Bell test, 687
benzene, 47, 53, 275
benzoguanamine, 75, 77, 86
benzoin methyl ether, 17
benzophenone, 17, 516
benzoyl peroxide, 13, 102
benzyl cellulose, 434
Berthelot, 122, 273, 275
Berzelius, 89
Bevan, 28, 420, 428
Bischoft, 377
bisphenol A, 122, 123, 377, 378
bitumens, 404-406

- applications, 406
- history, 404, 405
- nomenclature, 405
- processing techniques, 405, 406
- properties, 406

blocked isocyanates, 177-179
blowing agents, 513, 515
blow molding, 570-584

- blow extrusion, 573, 575
- form-fill-seal systems, 581-583
- injection blowing, 570-573, 575
- machine design, 577-580
- multi-layer blow molding, 584
- operating variables, 580, 581
- stretch blow molding, 576, 577

Blyth, 273
Bock, 452
boronazole, 479
boron polymers, 478, 479
boron trifluoride complexes, 133, 134
Bouchardat, 451
Braconnot, 413
'bridging', 535
B.S.I., 666
bulk density, 669
bulk polymerization, 9

- acrylic polymers, 334, 335
- polystyrene, 277
- polyvinyl chloride, 244

Buna N, 451-453, 456, 457
Buna S, 451, 453, 456, 457, 459
burn marks, 569
butadiene, 46, 297-299
butadiene rubber, 453, 459-461
Butlerov, 370, 453
butyl benzyl phthalate, 494
butyl rubber, 454, 455, 458

C

calendering, 250-253, 626-631

- calender types, 627, 628
- faults, 629, 630
- PVC, 626-631
- requirements, 628, 629

camphor, as plasticizer, 28, 413, 494
 ϵ -caprolactam, 307, 310, 311
caprolactone, 110, 111
carbazole, 40
carbon black, 442, 499, 505
carbon dioxide, 485
carboxylic rubbers, 475
cardanol, 27, 38, 57
Carothers, 11, 12, 29, 359, 452
Carswell, 673
cashew nuts, 38
castan, 121
casting techniques, epoxy resins, 143, 144

- castor oil, 39, 105, 175
- cauoatchouc, 436
- Celcon, 373
- celluloid, 27, 28, 413, 415-420
- cellulose, 24, 28, 411-413
- cellulose acetate, 420-426
 - applications, 424-426
 - history, 420
 - manufacture, 422, 423
 - processing techniques, 423
 - properties, 423, 424
 - raw materials, 421
- cellulose acetate butyrate, 426, 427
 - applications, 427
 - manufacture, 426
 - properties, 426
- cellulose nitrate, 27, 28, 413-420
 - applications, 419, 420
 - history, 413, 414
 - manufacture, 414, 415
 - processing techniques, 415-418
 - properties, 418, 419
 - raw materials, 414
 - structure, 415
- cellulose propionate, 427
- chain stopper, 460
- Chardonnet, 414
- Charpy impact test, 676, 677
- chelating agents, 498
- chemical analysis, 687-696
- chloracetamide, as hardener for u/f resins, 82
- chlорendic anhydride, 97, 129
- chlorinated rubber, 449, 450
- chloroacetone, as hardener for u/f resins, 82
- chlorobutyl, 458, 459
- chloroprene, 462-465
- chlорsulphonated polyethylene, 222-224
- chrysotile, 504
- cinnamic acid, 274
- Clash and Berg test, 671
- coal, 35, 39, 41
- coal tar, 40-42
- coating methods, 547-549, 609-620, 631-636
- coextrusion, 550-555
 - basic methods, 551-553
 - equipment developments, 554
 - material developments, 554, 555
- coke, 42, 43
- cold bend and cold flex temperatures, 670, 671
- colorants, 508-512
- compreg, 60
- compression and transfer molding, 520-532
 - compression molds, 521-524
 - ejection from molds, 525
 - finishing of moldings, 531
 - heating systems, 525, 526
 - manufacture of molds, 524, 525
 - molding faults, 531, 532
 - presses, 526-530
 - transfer molds, 524
- condensation polymerization, 11-13
- conditioning of test samples, 667
- confirmatory tests (analysis), 689-691, 693-695
 - cellulose, 689, 690
 - epoxides, 693
 - melamine formaldehyde, 693
 - nylon, 693
 - phenol formaldehyde, 693
 - phthalates, 693, 694
 - polyethylene terephthalate, 693
 - polyvinyl alcohol, 694
 - PVC and copolymers, 694
 - shellac, 695
 - silicone, 695
 - urea formaldehyde, 693
- copolymerization, 19, 20
- cotton linters, 26, 411, 414
- coumarone indene resins, 41, 405
- Crawford, 330
- crepe rubber, 39, 437, 444
- cresol-formaldehyde, 56, 57

crocidolite, 504
Cross, 28, 420, 428
cross-linking agents, 98, 101,
128-136
crow's feet marks, 629
crystalline melting point, 21, 22
cumene process for phenol, 44, 54
cup flow test, 685
cuprammonium rayon, 428
curing: aminoplasts, 13-19, 82, 83
epoxies, 127-135
cyanamide, 74, 75
cyclic epoxy resins, 124, 125
cyclized rubber, 447, 448
cyclodecane, 309
cyclodecanol, 309
cyclodecanone, 309
cyclohexanol, 45, 306
cyclohexanone, 47, 306
cyclohexanone formaldehyde, 57
cyclohexanone peroxide, 102

D

Dacron, 359, 360
decoration of plastics, *see*
ornamentation
deflection softening point, 670
degassing of extruders, 536
degree of polymerization, 12
de la Condamine, 436
Delrin, 373
density, 668, 669
diallyl phthalate, 99
dialphanol phthalate, 489
diazomethane, 194
dibutyl phthalate, 494
dibutyl tin dilaurate, 153, 498
dibutyl tin maleate, 498
dibutyl tin mercaptide, 498
dichlorhydrin, 122
dichlorostyrene, 99
Dickson, 29, 359
dicyclopentadiene, 470
dielectric constant, 679

dielectric strength, 679
Diels Alder reaction, 97
diethylene glycol, 92
diethylene triamine, 129
di-(2-ethyl-hexyl) adipate, 490
di-(2-ethyl-hexyl) azelate, 490
di-(2-ethyl-hexyl) sebacate, 490
diisocyanates, 168-172
diisooctyl phthalate, 489
diluent for epoxy resins, 135, 136
dimensional tests, 668, 669
dimethyl dichlorsilane, 149
dimethylol urea, 76
dimethyl silane diol, 151
dimethyl terephthalate, 360
dimethyl tin dichloride, 481
dimethyl tin diol, 481
D.I.N., 667
dioctyl phthalate, 489
diphenyl carbonate, 377
diphenyl dichlorsilane, 147, 150
diphenylol propane, *see bisphenol A*
diphenyl tin dichloride, 481
diphenyl tin diol, 481
dipping, 610, 611
divinyl acetylene, 462
divinyl benzene, 99, 278
dodecyl lactam, 309, 310
dough molding, 114, 115
drape forming, 338, 593
Dreyfus brothers, 420, 433
dry coloring, 511
drying oils, 105, 107, 406
Duppa, 330
Duprene, 452

E

ebonite, 445, 446
eccospheres, 508
Eckert, 31
Einhorn, 376
ejection of moldings, 525, 557, 563
electron beam, 18, 19
electrophilic initiators, 372

- electrostatic coating, 613, 614
 - Ellis, 89
 - emulsion polymerization, 10
 - acrylic polymers, 335
 - polystyrene, 277
 - polyvinyl chloride, 243, 244
 - end-group analysis, 25, 26
 - environmental stress cracking, *see stress cracking*
 - epichlorhydrin, 121
 - epoxidized esters, 491, 492
 - epoxy novolak resins, 123, 124
 - epoxy resins, 121–145
 - applications and processing techniques, 141–145
 - compounding ingredients, 135, 136
 - curing techniques, 127–135
 - fillers, 138, 139
 - flexibilizers, 136–138
 - properties, 139–141
 - ethyl benzene, 275, 276
 - ethyl cellulose, 433, 434
 - ethylene, 44–47, 92, 194–196, 240
 - ethylene copolymers, 193, 203, 218–220, 343, 351, 352, 357, 469–471
 - ethylene cyanohydrin, 296, 297
 - ethylene glycol, 92, 94, 174, 360, 361
 - ethylene glycol maleate, 109
 - ethylene-methacrylate copolymer, 343
 - ethylene oxide, 92, 297, 331
 - ethylene propylene rubbers 469–471
 - ethylene vinyl acetate copolymer, 219, 220
 - ethylene vinyl acetate rubbers, 474
 - ethylene vinyl alcohol copolymers, 271
 - Euler, 451
 - EVOH, *see ethylene vinyl alcohol copolymers*
 - expanded ebonite, 447
 - expanded polystyrene, 279–284, 292–296, 549, 550
 - extenders, 488, 494
 - extrusion, 533–556
 - coating, 547–549
 - coextrusion, 550–556
 - expanded polystyrene, 549, 550
 - film, 537–541
 - pipe, 545, 546
 - profiles, 546, 547
 - sheet, 541–543
 - wire and cable coverings, 543–545
- F**
- factice, 439, 440
 - Faraday, 451
 - fatty diamines, 137
 - fibers, 181, 305, 322, 323, 360, 362, 423
 - Fikentscher, 247
 - fillers, 138, 139, 442, 443, 503–508
 - classification, 504–507
 - effects and requirements, 503, 504
 - inorganic, 504–506
 - organic, 506, 507
 - properties and choice, 507, 508
 - film extrusion, *see extrusion*
 - films, additives for, 517, 518
 - finishing, 531
 - fire resistance, 512, 513, 671
 - 'fish eyes', 539
 - fish-tail die, 542
 - Fittig, 330
 - flame retarders, 512, 513
 - flame-spread, 512
 - flammability, 514, 671, 672
 - flash, 521, 532
 - flash type molds, 521
 - flexural strength, 675
 - flow measurement, 685, 686
 - fluorocarbon polymers, 345–358
 - fluorinated ethylene/propylene copolymer, 352, 357

fluorinated silicones, 355
fluoro-acrylate elastomers, 354,
355
fluorocarbon elastomers, 352,
353
fluoro polyesters, 355
history, 345, 346
poly(monochlorotrifluoroethy-
lene), 348–350, 356, 357
poly(tetrafluoroethylene),
346–349, 356
polyvinyl fluoride, 350, 351,
357
polyvinylidene fluoride, 351
foams, 66, 87, 88, 173, 182–185,
189, 268, 279–284, 292–296
formaldehyde, 54, 57, 370, 372,
373
Frankland, 330
free radicals, 13, 14, 242, 244, 460
Friedel-Craft catalysts, 455
Fritsch, 14
'frost' line, 538
fumaric acid, 96, 97
functionality, 2-5, 7, 11, 13, 76,
172, 195, 277
furane, 36, 66–68
furfuraldehyde, 56
fusible interlinings, 614–624

G

gating of molds, 564, 565
'gel' coat, 112
gel point equation, 11, 12
Gerrard, 478
Gilson, 405
Gilsonite, 405
glass fibers, 112, 505, 506
glass reinforced nylon, 326, 327
glass transition temperature, 22, 576
gloss, 679, 680
glycerol, 44, 59, 93
glyptals, 89, 109
Goldschmidt, 73
Goodyear, 445
Gordon, 447
granulation polymerization, 336
gravure coating, 635, 636
Greenlee, 121
Grignard process, 149
grinding, 606–609
ground nuts, 38
Gussoni, 572
gutta percha, 438

H

Hancock, 445
hardness, 678
hard rubber, 445–447
Harries, 447
haze, 679, 680
heat distortion temperature,
670
heating of extruders, 535, 536
hevea brasiliensis, 39, 436
hexachloroethane, 349
hexafluoropentylene adipate, 355
hexafluoropropylene, 353, 354
hexahydrophthalic anhydride,
129
hexamethylene diamine, 306, 308
hexamethylene diisocyanate, 174
hexamethylene tetramine, *see*
hexamine
hexamine, 54, 55, 59, 70, 71, 77,
83
hexanediol diacrylate, 16
Hill, 330
hobbing, 524, 525
Hoffmann, 273
hot runners, 564, 565
hot slug, 565, 566
Houdry process, 298, 299
Hyatt, 28, 31, 413
hydrogen bonding, 258, 315, 316,
412
hydroquinone, 100
Hypalon, 223, 224

- I**
- impact strength measurement, 675-678
- indene, 41
- inflammability characteristics of polymers, 514
- inhibitors, 100, 274
- injection molding, 557-570
 - machine characteristics, 559, 560
 - machine types, 560
 - machine variables, 560-562
 - mold design, 562-566
 - molding faults, 568-570
 - safety, 567
 - structural foams, 567, 569, 570
 - thermosets, 567
- inorganic pigments, 509, 510
- inorganic polymers, 477-485, *see also under respective elements*
- interfacial polycondensation, 378, 379
- irradiated polyethylene, 221, 222
- isobutylene, 453
- isocyanates, 169-172
- isoprene, 451, 454, 467
- isotactic polypropylene, 227
- isotactic polystyrene, 284, 285
- Izod impact test, 675-678
- J**
- John, 73
- K**
- Kel-F, 352, 353
- Kienle, 2, 12, 89, 154
- Kipping, 146, 147, 149
- K value: molecular weight, 247, 248
 - thermal insulation, 293
- Knapsack Griesheim, 603
- Koratron, 82
- L**
- Kraton, 473
- lac, 407
- lactic acid, 36, 59
- ladder polymers, 401, 402
- laminates, 62, 79, 84, 86, 87, 111-115, 117, 118, 142, 143
- laminating resins, 59, 61, 78, 90, 101, 111
- land, 524
- land length, 578, 579
- Lassaigne sodium fusion test, 696
- latex, 437
- lead polymers, 482
- Leucho, 433
- Liebig, 73
- light scattering, 27
- light transmission, 680, 681
- Lillienfeld, 433
- linseed oil, 105
- Lopac, 343
- M**
- machining: of molds, 524
 - of polymers, 289, 338, 375
- macromolecules, 29
- maleic anhydride, 96, 97
- malonic acid, 4
- manifold die, 540, 541
- mastication of rubber, 438, 439
- matched metal molding, 113
- matched mold thermoforming, 585
- Maynard, 413
- melamine, 74, 75
- melamine-formaldehyde, 78, 84-87
- melt flow index, 205, 228, 247, 685, 686
- melt fracture, 580
- melt spinning of fibers, 637, 638
- mercaptans, 460, 466
- mercaptobenzthiazole, 441
- Merriam, 413

methacrylic acid, 331
 methyl acrylate, 331, 332
 methyl cellulose, 434, 435
 methylene diamine, 4
 methyl methacrylate, 99, 331, 333
 2-methyl pentane, 47
 mica, 505, 506
 microballoons, 505
 microspheres, 505
 mixed polymers, 19
 modified polyethylene, 222–224
 modified rubbers, *see rubbers*
 molasses, 93
 molding faults: compression and transfer, 531, 532
 injection, 565, 566, 568, 569
 molds: blow, 578–580
 compression, 521, 522, 524
 injection, 562–565
 transfer, 523–525
 molecular weights, 22–27
 monochlorotrifluoroethylene, 349
 mono vinyl acetylene, 462, 464
 multilayer blow molding, 584

N

naphtha, 47
 Nason, 673
 Natta, 30, 225, 243, 284, 452, 467
 natural products, as raw materials, 36–39
 natural rubber, *see rubber*
 necking-in, 548, 549
 Neoprene, 30, 456, 457, 462–465
 Neumann, 273
 Neuss, 73
 Newtonian fluids, 263
 Nieuwland, 462
 nitrile rubbers, 452, 456, 457, 461, 462
 nitrogen determination, 695
 non-burning, 512, 671
 Noryl, 385
 notch sensitivity, 677
 novolak, 55, 58–60, 62, 63

nucleating agent, 549
 nucleophilic initiators, 372
 number average molecular weights, 23, 24
 number of mold cavities, 562
 Nylon 6: 305, 310, 313, 317, 318, 321, 323, 325
 Nylon 11: 305 307, 311, 313, 317, 318, 321, 322, 323, 325
 Nylon 12: 305, 309, 312, 322
 Nylon 6,6: 305, 306, 308, 313, 315–319, 321, 323, 325, 327
 Nylon 6,10: 305, 307, 313, 316–318, 321, 323, 325
 nylon copolymers, 312, 313, 318, 321, 323, 324
 nylon salt, 308

O

Oenslager, 441
 operating variables, in blow molding, 580, 581
 optical tests, 679–683
 organic fillers, 505–507
 organosols, 262
 orientation of film, 232, 233
 ornamentation of plastics, 657–665
 dry offset printing, 660, 661
 flexographic printing, 661, 662
 ‘free’ ornamentation, 657, 658
 gravure printing, 662
 heat transfer labelling, 662, 663
 hot foil stamping, 663, 664
 in-mold decoration, 663
 labelling, 658, 662, 663
 printing, pre-treatment, 658, 659
 screen printing, 659, 660
 vacuum metallizing, 664
 osmotic pressure and molecular weight, 24, 26
 Ostromislensky, 238
 oxybenzoyl polyesters, 394, 395
 ozone, 442, 471, 474

P

- pale crepe rubber, 437, 444, 581
parison, 570, 574, 576
 thickness control, 575, 584
Parkes, 27, 28, 413, 486
Parkesine, 413
parylenes, 396-398
pastes, PVC, 262-266
Patrick, 465
Paul, 330
PEEK, 388
pelleting, 528, 529
Pelouze, 413
pentaerythritol, 94
pentoses, as raw materials, 37
peptizers, 439, 446
peracetic acid, 124
Perbunan, 452
permeability, *see testing, trans-
mission tests*
petroleum, as raw material, 44-47
petroleum still residues, 405
phenol, 37, 53, 54, 122, 306
phenolic foams, 66
phenoplasts, 6, 52-72
 applications, 63, 66
 furanes, 66-68
 history, 52, 53
 manufacture, 57-60
 phenol aralkyls, 68-72
 processing, 60-62
 properties, 62-66
 raw materials, 53-55
 resinification, 55, 56
 variation of basic constituents,
 56, 57
phenoxy resins, 125-127
Phillips process for polyethylene,
195, 198, 200
phosgenation process for poly-
carbonate, 378
phosgene, 169, 170, 376, 378
phosphonitrilic chloride, 482, 483,
513
phosphoric acid, 83
phosphorus-nitrogen polymers,
482-484
photoinitiation, 17
phthalic acid, 95
physical testing, 666-687
pigments, 508-511, 516
'pinch-off', 579, 580
pipe extrusion, 545, 546
pitch, 40, 41, 405
plasticizers, 92, 486-494
 for rubber, 489
 function, 487, 488
 general classification, 488
 requirements, 488, 489
 types, 489-494
plasticizing capacity of injection
molding machines, 559
plastics, definition of, 1
plastigels, 262
plastisols, 262-264
plenum chamber technique, 113
plug and ring thermoforming, 595
plug assist thermoforming, 594,
595
plywood, 57, 60
Poisseuille's law, 25
Pollak, 73
polyacetals, 370-376
polyacrylates and polymethacrylates,
330-340
 applications, 339, 340
 basic formula of monomers,
 330, 331
 history, 330
 polymerization, 334-336
 preparation of acrylates, 331,
 332
 preparation of methacrylates,
 333
 processing techniques, 338, 339
 properties, 336-338
polyacrylonitrile, 341, 342
polyallomers, 218
poly(amide-imide), 391

- polyamides, 305–329
 - amorphous, 327–328
 - applications, 321–329
 - aromatic, 390
 - copolymers, 312–314
 - history, 305, 306
 - manufacture, 308–312
 - properties, 317–321
 - raw materials, 306–308
 - structure, 314–317
- poly(aryl ether), 395
- poly(aryl sulfone), 395, 396
- polybenzimidazole, 398, 399
- polybenzoxazoles, 399
- polybenzthiazole, 399
- polybutadiene, 452, 453, 467–469
- poly(butene-1), 235, 236
- polycarbonate, 371, 376–380
- polychloroprene, 456
- polyester resins (thermoplastics), 359–369, 374
 - copolymers, 368, 369
 - fibers, 360–362
 - films, 362–364
 - history, 359
 - injection molding, 364
 - stretch blow molding, 364, 365, 368
- polyester resins(thermosets), 89–120
 - applications, 118, 120
 - classification, 90–92
 - cross-linking monomers, 98, 99
 - history, 89, 90
 - polymer structure and chemical techniques, 101–104
 - polymer structure and curing techniques, 104–111
 - processing techniques, 111, 115
 - properties, 115–118, 119
 - raw materials, 92–97
 - resin preparation, 98, 100, 101
- poly(ether ether ketone), 388
- poly(etherimide), 387, 388
- poly(ether sulfone), 393, 394
- polyethylenes, 193–224
 - applications, 210–218
 - chlorsulphonation, 222–224
 - compounding, 204
 - copolymers, 218–221
 - halogenation, 222
 - history, 194, 195
 - irradiation, 221, 222
 - linear low density, 195, 202, 209
 - oxidation, 222
 - polymerization, 196–202
 - preparation of monomers, 195, 196
 - properties, 204–209
 - structure, 202, 203
 - very high molecular weight, high density, 224
- polyethylene terephthalate, *see polyester resins (thermoplastics)*
- Poly FBA, 355
- polyformaldehyde, 372, 373, 375, 376
- poly(imidazopyrrolone), 401, 402
- polyimide, 392, 393
- polyisobutylene, 453, 454
- polyisoprene, 1, 437, 438, 452, 467
- polymer, definition, 1
- polymerization reactions, 8–11
- poly(methyl pentene), 236
- poly(monochloro-p-xylylene), 396
- polyoxadiazole, 399, 400
- polyoxymethylene, 371
- poly(phenylene oxide), 385–387
- poly(phenylene sulfide), 394
- poly(phenyl quinoxaline), 402, 403
- poly(phenyl triazole), 400
- polypropylene, 225–235
 - applications, 230–235
 - history, 225
 - pearlized, 233, 234
 - polymerization, 225, 226
 - preparation of monomer, 225
 - properties, 228–230
 - structure, 226–228
 - talc-filled, 230

- poly(p-xylylene), 396
 - polysiloxanes, 147, 151–153
 - polystyrene, 273–304
 - applications, 286, 289–292
 - chemical structure, 284, 285
 - copolymers, 296–304
 - expanded, 279–284, 292–296
 - history, 273
 - polymerization, 276–278
 - preparation of monomer, 273–276
 - properties, 285–288
 - toughened, 278, 279
 - polysulfide rubbers, 452, 453, 456, 457, 465–467
 - polysulfides as flexibilizers for epoxy resins, 136, 137
 - polysulfones, 380–385
 - poly(thiadiazole), 400
 - polyurethane rubbers, 173–175, 453
 - polyurethanes, 168–192
 - applications, 189–191
 - history, 168, 169
 - manufacture, general, 175–181
 - manufacture, of foams, 173
 - manufacture, of rubbers, 173–175
 - polymerization and structure, 172
 - processing, 182, 183
 - properties, 183–188
 - raw materials, 169, 170
 - polyvinyl acetate, 257
 - polyvinyl alcohol, 257, 258
 - polyvinyl chloride, 247–257, 262–268, *see also, vinyls*
 - Porvair, 191
 - positive molds, 521, 522, 524
 - potting, 143
 - powder coating, 603–625
 - compounding, 605, 606
 - dipping, 610
 - electrostatic spray, 611–614
 - flame spraying, 612
 - fluidized bed, 611
 - granules, use of, 619
 - grinding, 606–609
 - history, 603–605
 - metal, coating of, 609–614
 - paste printing, 616
 - polymers used, 620–623
 - powder printing, 617–619
 - preformed net, 618
 - sintering, 614
 - textiles, coating of, 614–619
 - uses, 622, 624
 - power factor, 678, 679
 - predetermined coating systems, 633–636
 - predrying, 535
 - preforming, 528, 529
 - preheating, 528, 529
 - premix molding, 114, 115
 - presses, 526–530
 - press forging, 653, 654
 - pressure bag molding of polyesters, 114
 - pressure forming, 585, 596
 - Priestley, 436
 - printing of thermoform sheet, 591
 - profile extrusion, 546, 547
 - propylene, 44, 46, 122, 225, 226, 297, 332
 - propylene glycol, 92
 - propylene urea, 81
 - propylene/vinyl chloride copolymers, 246
- Q**
- quartz, as filler for epoxy resins, 138
 - quinone, use to prevent cross-linking in polyester reaction, 100, 101
- R**
- radiation curing, 14, 15, 18, 19
 - ram forward time, 562
 - Raschig process, 54

- raw materials, 35–49, *see also*
respective polymers
- reactions, polymerization, 8–11
- reaction vessels for p/f, materials of
construction, 58
- reclaim rubber, 444, 445
- reduced viscosity, 25
- Reemay, 362
- refractive index, 682, 683
- regenerated cellulose, 427–433
film, applications, 431–433
film, manufacture, 428–430
film, properties, 430, 431
history, 427, 428
viscose rayon, 428, 430
- Regnault, 238
- Reid, 239
- reinforced plastics,
epoxy resin, applications, 142,
143
low pressure polyester
laminates, 112–114, 118
nylon/glass, 326, 327
polyester/glass, 117, 118
rod, 115, 118
silicone, applications, 164
tube, 115
- release agents, 162, 164
for epoxy resins, 139
- removal of moldings, 563
- Reppe, 239, 298, 331
- resinous curing agents for epoxy
resins, 134, 135
- resols, 55, 58–61, 63
- resorcinol formaldehyde resins, 57
- resorcinol, reaction with phosgene,
376
- Ridley, 436
- rigisols, 263
- Rilsan, 39
- Rimer, 482
- ring type mandrel in blow molding,
578, 579
- Ripper, 73
- Rockwell hardness, 678
- rod, glass/polyester, 115, 118
- Rohm, 330
- rosin, 409, 410
- Rossiter, 73
- rotary mold injection molding
machines, 560
- rotational molding, 651, 652
- Roxburgh, 449
- rubber, definition of, 1, 2
- rubber, natural, 1, 2, 30, 39,
436–445, 456, 457
accelerators, 441
activators, 441, 442
antioxidants, 442
applications 443–445
compounding processes and
ingredients, 438
fillers, 442, 443
history, 436
mastication, 438, 439
peptizers, 439
processing techniques, 443, 444
properties, 443
raw materials, 437
retarders, 442
softeners, 439, 440
structure, 437, 438
vulcanization, 440
- rubber pad forming, 654, 655
- rubbers, modified, 445–450
chlorinated rubber, 449, 450
cyclized rubber, 447, 448
hard rubber, 445–447
rubber hydrochloride, 449, 450
- rubbers, synthetic, 30, 37, 159–161,
165, 166, 173–175, 182, 183,
185, 186, 189, 190, 341, 346,
352–355, 451–476, *see also butyl*
rubber, nitrile rubber, etc.
- runners, 521, 558, 564
hot, 564, 565

S

safety in injection molding, 567

- saturated acids for polyester formation, 95, 96
- saturated alcohols for polyester formation, 92-94
- saturated polyesters, classification, 91, 92
- S.B.R., 456, 459-461
- Schenck, 482
- Schnell, 377
- Schoenbein, 413
- Schutzenberger, 420
- Schweitzer, 428
- scorching of moldings, 563
- screen pack, 535, 539, 541
- screws, extruder,
 - compression ratio, 534
 - heating or cooling, 534, 536
 - l/d* ratio, 534
 - multiple, 537
 - speeds, 535
- sebacic acid, 95, 306, 307
- secondary cellulose acetate, 420, 422
- sedimentation velocity and molecular weight, 24, 27
- seed lac, 407
- 'see through' clarity, 679, 681, 682
- selenium polymers, 484, 485
- self-extinguishing, 512, 671, 672
- semiautomatic compression molds, 521
- semiflash compression molds, 522
- semipositive compression molds, 524
- Semon, 239
- shear, in extruders, 534
- shear thickening of PVC pastes, 263
- sheet extrusion, 541-543
- shellac, 39, 407, 408
- shellolic acid, 408
- shielding of functional groups, 4, 7
- Shore hardness, 678
- short moldings, 568
- shot capacity, 559
- shrinkage, of moldings, 563, 564
- silane, 147
- silica as filler,
 - epoxy resins, 138, 139
 - silicone elastomers, 160
 - silicone fluids, 160
- silicones, 139, 146-167
 - applications, 161-167
 - compounding, 160, 161
 - fluorinated, 355
 - history, 146
 - nomenclature, 147, 148
 - polymerization and structure, 150-155
 - processing techniques, 161
 - properties, 155-160
 - raw materials, 148-150
- silk, artificial, 414
- siloxane linkage, 147
- Simon, 273
- sink marks, 561, 562, 564, 568, 570
- sinter casting, 651, 652
- 'slip-in' in plug-assist thermoforming, 594, 595
- slit die extrusion, 537, 540, 541
- slush molding, 637
- Smith, 89
- smoked sheet, 437, 444
- snap-back vacuum forming, 595
- sodium carboxy methyl cellulose, 435
- sodium fusion tests, 695, 696
- sodium polysulfide, 465-467
- sodium trithiocarbonate, 428
- softeners for rubber, 439, 440
- softening point, and internal forces, 4, 315, 316
- solid-phase forming, 652-657
- solid-phase pressure forming, 655, 657
- Solprene, 472-474
- solution polymerization, 9, 10
- sorbitol, 94
- Spandex fiber, 191
- specific gravity, 668, 669

- specific viscosity, 25
 spherulites, 203
 'spider', 545, 578
 'spider' memory, 578
 Spill, 413
 Spitteler, 28
 spray molding, 113, 114
 spreading, 631
 of phenoplasts, 62
 of PVC, 265, 266
 stabilizers, 494–498
 synergism of, 496
 stack molds, 562
 starch, 36, 37
 Staudinger, 29, 372
 Stearn, 428
 stereoblock copolymers, 227
 stereospecific catalysis, 30, 225, 467
 stick lac, 407
 Stokes, 482
 storax, 273
 stress cracking, 207, 208, 229, 397
 tests, 686, 687
 stress/strain curves, 672–674
 stretch blow molding, 364, 365, 368, 576, 577
 stretched film tape, 637–643
 fibrillation, 642
 film extrusion, 640
 slitting and stretching, 640
 texturization, 643
 winding, 641, 642
 stretch forming, 655
 strippable coatings, 427
 stripper plates, 563
 structural foams, 567, 570
 styrene, 273–276, 279
 as diluent for epoxy resins, 136
 for curing polyester resins, 99
 styrene/butadiene rubbers, 273, 456, 457, 459–461
 styrene copolymers, 296–304
 applications, 302–304
 polymerization, 299, 300
 preparation of monomers, 296–299
 properties, 300–302
 structure, 300
 sulfite wood pulp, 411
 sulfonation process for phenol, 53
 sulfur, as vulcanizing agent, 7, 8, 440, 441
 for heat hardening bitumen plastics, 406
 polymers, 484, 485
 super fibrillated film, 639
 surface coatings,
 epoxy, 142
 phenol-formaldehyde, 56
 polyamide, 322
 polyester, 104–108
 polyurethane, 175–181, 188, 190
 urea-formaldehyde, 79, 80
 surface streaks, 569
 suspension polymerization, 10
 Swarts, 350
 Swinburne, 28
 syndiotactic polypropylene, 227
 syntactic foams, 66
 synthetic rubbers, *see rubbers, synthetic*
- T
- Tachardia Lacca, 407
 tack, rubber, 439
 tapping, rubber trees, 437
 tenacity, 639, 641
 tensile properties and tests, 672–675
 terephthalic acid, 360
 Terylene, 359, 360
 testing, plastics, 666–697
 chemical analysis, 687–696
 conditioning of test samples, 667
 creep, 674, 675
 dimensional tests, 668, 669
 electrical tests, 678, 679

- environmental stress cracking, 686, 687
 - fabrication of specimens, 668
 - flame tests, 690, 691
 - flammability, 671, 672
 - flow measurements, 685, 686
 - mechanical tests, 672–678
 - optical tests, 679–683
 - rate of testing, 668
 - simple identification scheme, 692
 - thermal tests, 669–671
 - transmission tests (permeation), 683–685
 - tetrafluorethylene, 346, 355
 - tetrafunctional groups, 7, 277
 - textile finishing, 80–83
 - thermal curing, 13, 14
 - thermal properties, 669–671
 - thermoforming, 585–602
 - automatic operation, 592
 - blister packaging, 597–599
 - decoration, 591
 - developments, 597
 - form/fill/seal, 600–602
 - machine variables, 589–591
 - methods, 585, 592–597
 - polymers used, 585–589
 - skin packaging, 599, 600
 - trimming of moldings, 591, 592
 - thermoplastic rubbers, 471–474
 - thermoplastics, definition of, 2
 - thermal behavior, 4, 5
 - thermosets, definition of, 2
 - gel points, 11, 12
 - injection molding of, 567
 - structure, 5, 6
 - thin-wall injection moldings, 561
 - thiokol rubbers, 456, 457, 465–467
 - thiourea, 73, 75
 - Tilden, 451
 - tin polymers, 480–482
 - titanium polymers, 480
 - titanium tetrachloride, 198
 - toggle-action mold closing, 560, 561
 - toluene p-sulfonic acid, 196
 - tolylene diisocyanate, 169, 170
 - tooling, epoxy resins, 144
 - toughened polystyrene, 278, 279, 285–292
 - tracking, 678
 - transfer molding, 521
 - transfer molds, 523, 524
 - triallyl cyanurate, 99
 - tricresyl phosphate, 239
 - triethylamine, 129
 - triethylene tetramine, 129
 - triethyl phosphate, as curing agent, 82
 - trifluoronitrosomethane, 355
 - trihydroxy palmitic acid, 407, 408
 - trimellitic anhydride, 91, 391
 - Trinidad Asphalt Lake, 405
 - trioxane, polymerization of, 373
 - triphenyl phosphate, 494
 - triphenyl phosphine, 373
 - tritoyl phosphate, *see tricresyl phosphate*
 - Tschunkur, 452
 - tube, manufacture of glass reinforced polyester, 115
 - tube, manufacture of phenol formaldehyde impregnated, 62
 - 'tunnel test', for flammability, 671, 672
 - twisted film fibers, 638, 639
 - two-pot system for polyurethanes, 176, 177
- U
- Udel, 380–385
 - Ultem, 387, 388
 - ultra-centrifuges in molecular weight determination, 27
 - ultraviolet absorbers, 515, 516
 - undecylenic acid, 39
 - unsaturated acids for polyester formation, 96, 97
 - unsaturated alcohols for polyester formation, 94

- unsaturated compounds,
 - epoxidation, 124
 - unsaturated polyesters
 - classification, 90, 91
 - molding powders, 109, 110
 - urea,
 - history, 73
 - manufacture, 74
 - urea formaldehyde resins, 73–88
 - applications, 85–88
 - chemistry, 76, 77
 - curing or hardening agents, 82, 83
 - foams, 87, 88
 - history, 73, 74
 - manufacture of,
 - adhesives, 78
 - laminating resins, 78, 79
 - molding powders, 77, 78
 - surface coatings, 79, 80
 - processing techniques,
 - adhesives/laminates, 83, 84
 - processing techniques, molding powders, 83
 - properties, 84, 86
 - raw materials, 74, 75
 - resinification, 76, 77
 - shelf-like of adhesives, 78
 - urethane oils, 176
- V
- vacuum bag molding of polyesters, 114
 - vacuum forming, 585, 593
 - Van der Waal forces, 4
 - van't Hoff law, 26
 - vapor pressure and molecular weights, 24
 - varnishes, phenol formaldehyde, 60, 62
 - veneers, using phenol formaldehyde adhesives, 60
 - veneers, using urea formaldehyde adhesives, 83, 84
 - venting,
 - of extruders, 536, 537
 - of molds, 521, 563, 580
 - Versalon, 314
 - versamids, 314, 320–325
 - as flexibilizers for epoxy resins, 136
 - vicat softening point, 670
 - vinyl acetals,
 - manufacture, 241, 242
 - polymerization, 245
 - vinyl acetate, copolymers with vinyl chloride,
 - manufacture, 259, 260
 - polymerization, 260
 - vinyl alcohol, 241
 - vinyl benzene, *see styrene*
 - vinyl chloride
 - copolymers with propylene, 246, 261, 262
 - copolymers with vinyl acetate, 246, 247
 - copolymers with vinylidene chloride, 247
 - manufacture, 239, 240
 - polymerization, 242
 - vinyl ether,
 - manufacture, 239, 240
 - polymerization, 245, 246
 - vinyl flouride, 350
 - vinylidene flouride copolymers, 346, 352–354
 - vinyls, 238–272
 - applications, 265–270
 - calendering of PVC, 250, 252, 253
 - classification, 247, 248
 - compounding, 249, 250
 - compression molding, 255
 - copolymers, 246, 247, 271
 - extrusion, 253, 254
 - formulations, 251
 - history, 238, 239
 - injection molding, 254, 255
 - pastes, 262–265

- polymerization, 242-246
 - properties, 255-262
 - raw materials, 239-242
 - structure, 248, 249
 - vinyl toluene, 99
 - vinyl type monomers, 99
 - viscose, 428-430
 - rayon, 28, 428, 430
 - viscosity,
 - measurements to follow course of reaction, 52, 78
 - melt, and molecular weight, 205, 247, 248, 685, 686
 - viscosity and molecular weight determination, 24, 25
 - viscosity average molecular weight, 24
 - Vitons, 353
 - voids, 561, 568
 - volume resistivity, 678
 - von Hedenstrom, 377
 - vulcanite, 445
 - vulcanization, 2, 8
 - of chlorosulfonated polyethylene, 223
 - of ethyl acrylate rubbers, 341
 - of natural rubber, 440, 445
 - of Neoprene, 463
- W**
- walnut shell flour, 506, 507
 - warpage of moldings, 563, 569
 - weight average molecular weight, 23, 24
 - welding, 643-651
 - friction, 645
 - heated tool, 645
 - heat sealing of closures, 651
 - heat sealing of film, 647-650
 - high frequency sealing of film, 648, 649
 - hot gas, 644
 - infrared sealing of film, 650
 - spin, *see friction*
 - ultrasonic, 645-649,
 - weld lines, 569, 579
 - wet lay-up technique for polyester laminates, 112, 113
 - wet strength paper, 87
 - Whinfield, 29, 359
 - Wickham, 436
 - Williams, 451
 - wire and cable covering, 543-545
 - Wohler, 73
 - wood, as raw material, 36
 - woodflour, 59, 63, 505, 506
 - wood pulp, 35, 411, 422, 426, 428
 - Wurtz, 168
- X**
- xanthate process for regenerated cellulose, 428-430
 - Xylock resins, 53, 70, 71
- Y**
- yield point, 674
 - yield stress, 672-674
 - Young's modulus, 674
- Z**
- Ziegler, 30, 195, 198, 225, 243, 452, 467
 - Ziegler and Eckert injection molding machine, 31
 - zinc sulfate, 82
 - zipper reactions, 495



Polymer engineering is generally an engineering field that designs, analyses, and/or modifies polymer materials. Polymer engineering covers aspects of petrochemical industry, polymerization, structure and characterization of polymers, properties of polymers, compounding and processing of polymers and description of major polymers, structure property relations and applications. Polymer materials and polymer solar cells are some of the most important technological inventions. *Advances in Polymer Technology* a quarterly peer-reviewed journal edited under the auspices of the Polymer Processing Institute presents important developments in polymeric materials production and processing methods and equipment and product design. In addition to original articles on trends and advances in polymer technology the editors welcome review articles technico-economic studies and patent reviews as well as The Polymer Technology staff is responsible for courses at the BSc, MSc and PhD level. Our contact with industry is ensured via part-time professor positions. Our group is an integral part of the Materials Technology Institute connecting materials and mechanics at TU/e for more than 25 years. We are also one of the leading participants in the research school Eindhoven Polymers Laboratory. Several members are also affiliated with the TU/e Institute of Complex and Molecular Science. Close.